




NETWORK CAMERA SK-N140X

Professional network camera for outdoor monitoring over IP networks

FEATURES

- MPEG4 dual stream
- Built-in web server
- DDNS support
- High Quality Images (up to 30fps@704x480)
- 1/3" COLOR SONY EXview HAD CCD
- 50M Range visible in total darkness with 40pcs of IR LEDs
- True day&night function (Exchange of two filters)
- Weather-proof for outdoor use
- Extra video test connector for easy installation
- Cable through bracket
- All-in-one (Built-in Lens, IR LEDs, Sunvisor & Bracket)

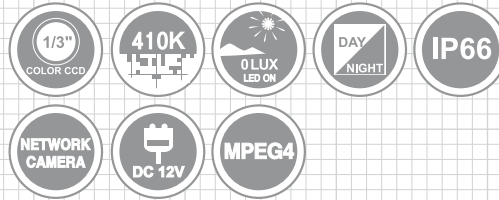

SYSTEM SPECIFICATION

MODEL	SK-N140X
NETWORK	RJ-45, 10/100BASE-T Ethernet
Static IP / Dynamic IP	SUPPORT
IP Server/ DDNS	SUPPORT
Web Server	YES
Supported Protocol	HTTP,FTP,TCP/IP,DHCP,ARP,DNS,ICMP
Multi-access	Max. 50 users
Bit rate[Max]	5,000Kbps
Motion alarm and image transmission	FTP,SMTP(E-mail) / SMS(Korea)
VIDEO	
RESOLUTION	704x480[Max] / 352x240
TV TYPE	NTSC / PAL
Frame Rate[Max]	30fps
COMPRESSION	MPEG-4 Dual Stream COMPRESSION RATIO :200:1(Typical)
TEST VIDEO OUTPUT	Analogue composite video output
SYSTEM	
F/W UPGRADE	BY INTERNET
LANGUAGE	English / Japanese / Korean
CAMERA	Same spec as SK-P400X
POWER	DC 12V , 1.2A

PC Application [Viewer & Controller]

PC OS	Win2000/XP/ NT
WEBVIEW	Built-in webview
MULTI-CHANNEL VIEWER	Multi-channel viewer, Record, Search, and etc.