

ADVANCED HIGH RES. DAY&NIGHT VANDAL-PROOF&FIRE-PROOF DOME CAMERA SK-D105D/M143AI SK-D105D/M143XAI




► PRECAUTION

1. You can install the camera indoors or outdoors.
2. Choose an ideal location for the camera, since a camera unit must be protected against vibration.
3. Be careful not to scratch the camera lens or dome cover.
4. Use the camera within the temperature (-10°C~+50°C).
5. Handle with care. Dropping it can cause serious damage to the camera.
6. Avoid any direct sun light toward the lens.
7. Use the AC adaptor 12V DC regulated or 24V AC. (500mA recommended)




If the product is to be put out of operation definitively, take it to a local recycling plant for a disposal which is not harmful to the environment.

► LENS ADJUSTMENT


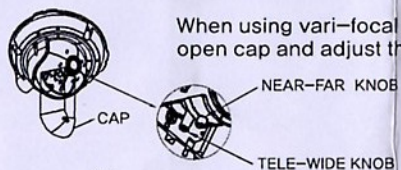


When using vari-focal lens, you can open cap and adjust the focal length.




- ① By turning the "Tele-Wide" knob, you can access a range of focal lengths within specified limits.
- ② Since then, by turning the "Near-Far" knob, you can set the focus toward the wanted object.

► DIMENSION




► INSTALLATION

1-1. CEILING MOUNT INSTALLATION

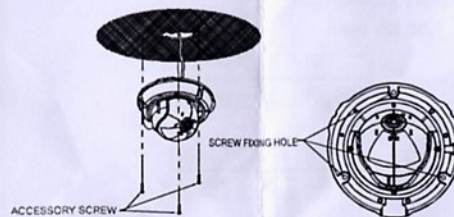


MOUNTING CAMERA TO ELECTRICAL BOX

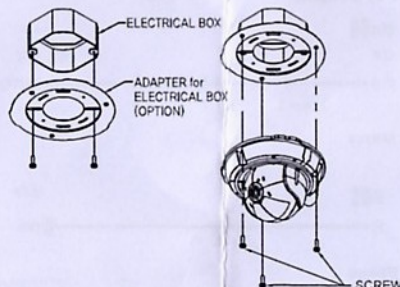

The camera can also be mounted on an electrical box by attaching the adapter to the electrical box.

INSTALLATION FOR THE WEATHERPROOF USE

1. After removing 1/2" bolt on the side of the camera, pull power and video cables from the side of the camera.
2. Pass the cables through the pipe.
3. Wrap the thread of the pipe in teflon tape and connect to the hole for secure use.
4. Attach the pad to the bottom on the camera.

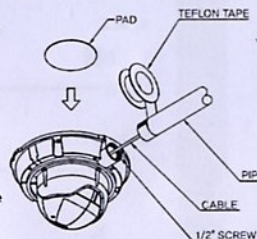


1-2. CAMERA DIRECTION ADJUSTMENT AND FIXING

- (1) Cover can be installed four directions using two screws beside the cover.
- (2) After loosening two screws on the cover, you can adjust the direction of camera
- (3) You can tighten up two screws again to fix the direction



2. WALL MOUNT INSTALLATION



You can install it on the wall as seen on the picture. Camera direction adjustment is the same as in case of ceiling mount installation.

3. COMPLETING THE INSTALLATION



Replace the dome cover by tightening up the 6 screws.



► FEATURES

- (1) IP66(Weather-proof)
- (2) Durable MATERIAL
Body : Aluminum,
Dome : Polycarbonate V_0 degree in UL94
- (3) Wall & Ceiling mount available
- (4) New method to adjust the camera direction (360° available)
- (5) Dual power(DC 12V & AC 24V) operation

► ASSEMBLY

