


## Weatherproof Color bullet camera with Vari-Focal Zoom lens

( High-res Color bullet camera)

The VB32HQX-H25 is a highly intensified Color CCD camera integrating absolutely professional features for the security. The image is instantly changed from Color to BW at 2 lux (True Color at day and true BW at night - Customer's Option), providing remarkably improved low light sensitivity of 0.01 Lux at no additional lighting. Truly natural coloration and crystal clear image performance with 1/3" CCD High resolution 560 TV Lines of HQ1 EX-View HAD guarantees an extreme value of the unit. The unit is fully weatherproof with 100% moisture-free after installation. It comes with a 2feet plus 4feet waterproof cable with a BNC connector for video and a DC jack for power at the end. Under perfect picture quality, small size, strong metal structure and easy way of installation, it outperforms conventional heavily mechanized big camera.

### Key features

- High resolution
- 0.01 Lux/F2.0
- Fully weatherproof(IP67)
- 25mm fixed focal lens
- 12VDC

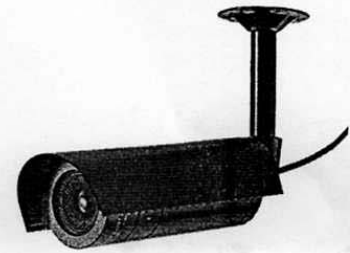

**VB32HQX-H25**  
Weatherproof  
25mm fixed focal lens  
560TVL, High resolution  
Sony  
0.01Lux.F2.0

### Specification

Image Sensor	High resolution, 1/3" HQ1 EX-View HAD CCD (Sony)
Min. Illumination	0.01 Lux at 2.0
Effective Pixels	NTSC : 768(H)X494(V) PAL : 752(H)X582(V)
H.Resolution	560 TV Lines
Synchronizing system	Internal
Scanning system	2:1 Interlaced
Video output	1Vp-p 75 ohm composite
S/N Ratio (AGC off)	More than 50 dB
Electronic Iris (Auto)	NTSC : 1/60-1/100,000 sec. PAL : 1/50-1/100,000 sec.
Smear effect	0.005%
Gamma correction	$r = 0.45 - 1.0$
White balance	Auto.2100°K - 9100°K
Gain control	Auto. 4dB~30dB
Lens	25mm fixed focal lens
MTBF	80,000 hours
Power source	DC12V(Tolerance: 10V-15V)
Operating current	130mA w/regulated power in
Measurement	32mm(Dia) x 102mm(L)
Weight(Approx.g)	260 in complete package (including Bracket)
<b>IR Sensitive Option</b>	workable with a separate IR illuminator for DAY/NIGHT view.
<b>Audio Option</b>	one way audio external with a flexible length of audio cable

### Dimensions and Connection (Unit : mm)

