

AVerMedia

AVerDiGi EB1304 NET Real Time MPEG4 Network Video Recorder

Compact • Light • Low Freightage



► Key Features

AVerDiGi EB1304 NET 4CH MPEG4 Real-Time Networking DVR provides multiplex function, user-friendly operation, and the most satisfied price to touch your heart.



Remote control multiple DVRs without glitch



Support CMS



Support Remote Console



Support PDA Viewer with video & audio



Support Pen-drive / External HDD backup



Motion Detection recording



Recording, Playback, and Networking



Auto scan set different switch time for each channel

AVerMedia

AVerDiGi EB1304 NET Real Time MPEG4 Network Video Recorder


Product Specifications

- 4 composite video inputs (BNC connector)
- 1 Composite & 1 VGA outputs
- Video compression: MPEG4
- Video Format: NTSC and PAL
- 1 channel audio input / output
- Fanless design to lower down the noise
- Display resolution:
 - 720 x 480 / 720 x 576 (NTSC / PAL)
- Display frame rate:
 - Total 120 / 100 fps (NTSC / PAL)
- Hue / Brightness / contrast / Saturation adjustable
- Recording resolution:
 - Full D1: 720 x 480 / 720 x 576 (NTSC / PAL)
 - CIF: 360 x 240 / 360 x 288 (NTSC / PAL)
- Recording frame rate:
 - Full D1: 60 / 50 fps (NTSC / PAL)
 - CIF: 120 / 100 fps (NTSC / PAL)
- Recording mode:
 - Schedule recording (00:00~24:00 set by hour)
 - Continuous / Motion / Sensor recording
- Auto recycle recording
- Auto record enabling
- Remote upgrade system
- Remote access:
 - Support CMS
 - Support PDA Viewer (with video & audio)
 - Support Remote Console & Web Viewer
- Password authentication mechanism
- Playback Mode:
 - Video search by date / time / event
 - 4096 event lists for easy search
 - A-B video repeat playback
- Free Playback Application Software:
 - Playback from Pen drive / External HDD
 - Playback and backup on any PC with Windows 2000 / XP
 - Converting files to AVI format enabling to playback on Windows Media Player
 - Video Enhancer to enhance highest-level video quality
 - Video segment selectable for repeating playback and backup
 - Enabling quick HDD to HDD backup
 - Watermark function for image verification
- I/O
 - 4 Sensor inputs
 - 1 Relay output controlling alarm, lock, light, or other devices
- Operating Temperature: 0°~55°C
- Dimension: (L) 290mm x (M) 180mm x (H) 52mm

Specification Highlight

Item	EB1304 NET
Video input	4
VGA output	1
TV output	1
Audio input/output	1
Sensor input	4
Relay output	1
Display Rate (NTSC / PAL)	120 / 100 fps
Recording Rate (NTSC / PAL)	120 / 100fps
USB Port	1

Application Diagram

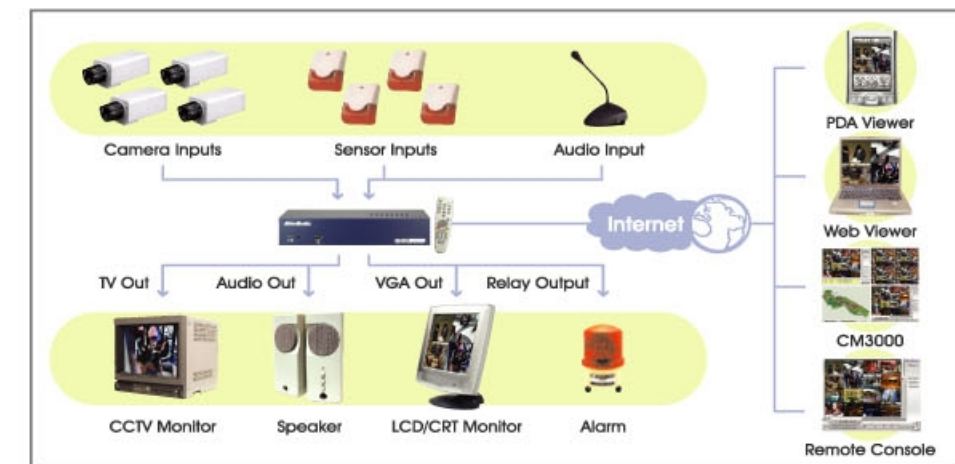

All right reserved. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means (Electronic, mechanical, photocopy, recording, or otherwise) without the written permission of AVerMedia. Information in this document is subject to change without notice. The information contained herein, is to be considered for informational purposes only and shall not be considered legally binding. 2006 by AVERMEDIA TECHNOLOGIES, Inc. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form by any means without the written permission of AVERMEDIA TECHNOLOGIES, Inc. AVerMedia is registered trademarks of AVerMedia Technologies, Inc. All other trademarks belong to their respective companies. Made in Taiwan.20061003



AVerMedia
www.avermedia.com
www.averdigi.com