

# HIGH SPEED DOME CAMERA

SK-S200/Z160 , SK-S200/Z160X  
SK-S200/Z140 , SK-S200/Z140X

CAMERA  
- SPEED DOME


## FEATURES

- Powerful 264X zoom
- 360 ° endless panning
- Max 400 ° /s speed at preset mode
- 128 Preset positions
- Auto - FLIP  
(Automatically turn 180 ° when the camera tilts to its lower limits)
- Privacy zone masking function (8 zone)
- Day&Night operation W/Built-in D&N lens: Option
- Alarm on action



## Dimensions

Unit:mm

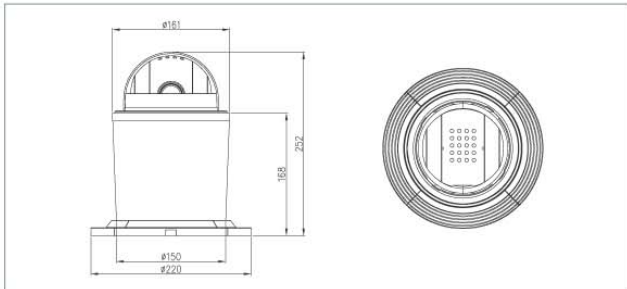

## Option

SK-AR12, SK-AR13: RS-485 Controller



SK-AR12



SK-AR13

## Specification

MODEL	SK-S200/Z160 SK-S200/Z160X	SK-S200/Z140 SK-S200/Z140X
CCD TYPE	1/4" COLOR SONY SUPER HAD CCD 1/4" COLOR SONY EXview HAD CCD	
MIN.ILLUMINATION	1 LUX (F/1.6) 0,1 LUX (F/1,6)	0,1 LUX (F/1,6) 0,01 LUX (F/1,6)
DAY&NIGHT	ELECTRONIC D&N	ICR
ZOOM	22X Optical, 12X Digital	
PIXEL	410K	
FOCAL LENGTH	f= 3,9 - 85,8mm	
PATTERN	4 patterns ( 210sec ~ 2 hours : depends on complexity)	
PRIVACY ZONE	8 zone	
TOUR	8 tours	
AUTO SCAN	CW / CCW / Custom mode	
PAN ANGLE	360 deg (ENDLESS)	
TILT ANGLE	180 deg (AUTO FLIP)	
PAN/TILT SPEED	Manual: 0,05~120 deg/sec Preset: Max,400 deg/sec	
ENDLESS ROTATE	Yes	
DIGITAL FLIP	Yes	
ALRAM INPUT	8	
ALRAM OUTPUT	Open collector (5V DC , 40mA) / Relay (2A 30VDC, 0,5A 125VAC)	
ADDRESS	255	
RS422/485 OPTION	Selectable	
PROTOCOL	AUTO (SK-P / PELCO-D)	
BAUD RATE	AUTO (2400 / 4800 / 9600)	
CURRENT CONSUMPTION	24V AC / 18W 1,5A	
OPERATION TEMP.	-10℃ ~50℃	
PRESERVATION TEMP.	-20℃ ~60℃	
DIMENSION	∅ 150 × 252(H)mm	
WEIGHT	Approx.2,2kg	

# HIGH SPEED DOME CAMERA ACCESSORY

For SK-S200 , SK-S250 SERIES


CAMERA  
- SPEED DOME

## Ceiling Mount Application

Ceiling Embedded Mount  
(SK-AB05)



Ceiling Mount  
(SK-AB04)

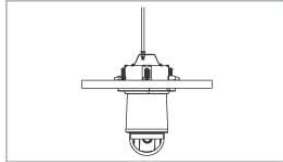

Pendant Mount(Indoor)  
(SK-AB07)



Pendant Mount(Outdoor)  
(SK-H241 + SK-AB12)



## Wall Mount Application

Indoor  
(SK-AB06)



Outdoor  
(SK-H241 + SK-AB16)



## Corner Mount Application

Indoor  
(SK-AB06+SK-AB09)



Outdoor  
(SK-H241+SK-AB16+SK-AB09)



## Pole Mount Application

Indoor  
(SK-AB06+SK-AB18+SK-AB17)




Outdoor  
(SK-H241+ SK-AB16+SK-AB18+SK-AB17)




## Accessories(Optional) for Speed Dome Camera(SK-S200 series/SK-S250 series)


Outdoor Housing  
(SK-H241)

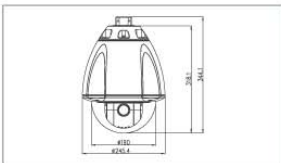


Outdoor Sunvisor  
(SK-AS01)

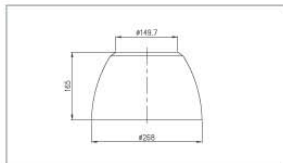

Pole Mount Adaptor  
(SK-AB18)

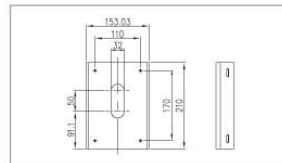


Steel Straps  
(SK-AB17)

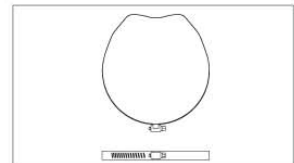


## Ceiling Mount Application


Pendant Mount Bracket (Indoor)  
(SK-AB07)

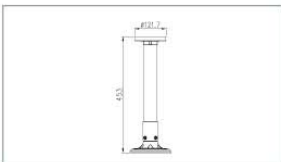


Pendant Mount Bracket (Out door)  
(SK-AB12)

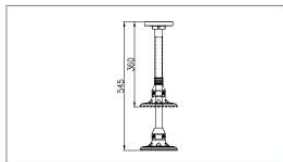

Ceiling Bracket  
(SK-AB04)

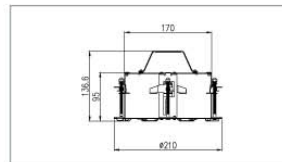


Ceiling Embedded Bracket  
(SK-AB05)

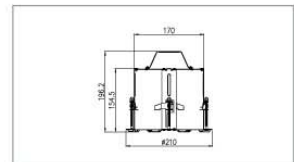


## Ceiling Mount Application

Wall Mount Bracket(Indoor)  
(SK-AB06)

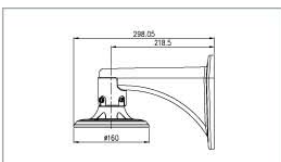

Wall Mount Bracket(Outdoor)  
(SK-AB16)

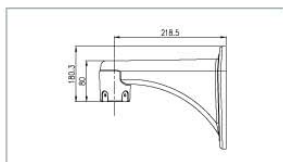

Corner Mount Adaptor  
(SK-AB09)

