

# 432X ZOOM HIGH SPEED DOME CAMERA

SK-S200/Z940

**NEW**



CAMERA  
- SPEED DOME


## FEATURES

- POWERFUL 432X ZOOM (Optical 36X, Digital 12X)
- 1/4" COLOR SONY EXview HAD CCD
- Built-in 36X Zoom module made by Sony Corp.
- 360° endless panning, 180° tilting
- Auto-Flip  
(Automatically turn 180° when the camera tilts to its lower limits)
- Max 400°/s speed at preset mode
- 128 Preset positions
- Privacy zone masking function(8 zones)
- Day & Night operation W/built-in D&N zoom lens
- Alarm on action, WDR, SENSE UP



## Dimensions

Unit:mm

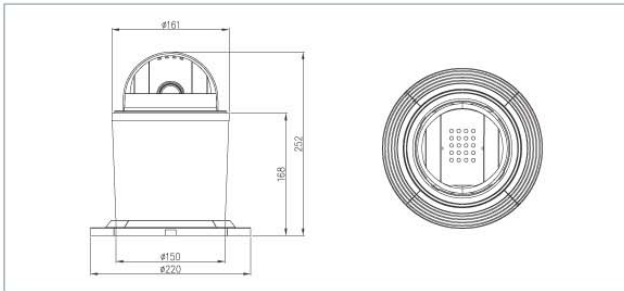

## Option

SK-AR12, SK-AR13: RS-485 Controller



SK-AR12



SK-AR13

## Specification

MODEL	SK-S200/Z940
ZOOM	36X Optical, 12X Digital
CCD	1/4" COLOR SONY EXview HAD CCD
PIXEL	410K
FOCAL LENGTH	f=3.4 ~ 122.4mm
MIN. ILLUMINATION	0.0001 LUX(W/SENSE UP)
DAY & NIGHT	ICR(AUTO/COLOR/BW)
WDR	On / Off
SENSE UP	On / Off
PRESET	128 points
PATTERN	4 patterns ( 210sec ~ 2 hours : depends on complexity)
PRIVACY ZONE	8 zones
TOUR	8 tours
AUTO SCAN	CW/CCW/Custom mode
PAN ANGLE	360 deg(Endless)
TILT ANGLE	180 deg(Auto Flip)
MANUAL PAN/TILT SPEED	0.05~120 deg/sec
PRESET PAN/TILT SPEED	MAX. 400 deg/sec
ALRAM INPUT	8
ALRAM OUTPUT	Open Collector (5VDC, 40mA)/Relay(2A 30VDC, 0.5A 125VAC)
ADDRESS (ID)	255
REMOTE CONTROL	RS-485 or RS-422
PROTOCOL & BAUD RATE	AUTO, SK-P, PELCO-D (2,400 ~ 9,600 bps)
POWER SUPPLY	24V AC / 18W 1.5A
OPERATION TEMP.	0 ℃ ~ 50 ℃
PRESERVATION TEMP.	-20 ℃ ~ 60 ℃
DIMENSION	φ 150 mm X 252(H) mm
WEIGHT	Approx.2.2kg